


PIX-Muscle® -XS3

High-power, Maintenance-free, Wrap Belts

Features

- Extremely high power rating - up to 50% more than standard Belts.
- High efficiency up to 98%.
- Special cord for maintenance-free operation.
- Extended service life & less machine down-time.
- Anti-static complies with ISO 1813.
- Superior oil & heat resistance.
- REACH & RoHS compliant provides an eco-friendly system.
- Extended temperature range -25°C to +100°C.

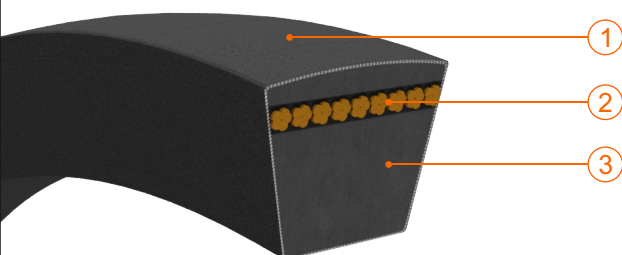

Construction Details

- 1 High wear-resistant outer jacketing, offers higher gripping strength.
- 2 Maintenance-free, low-stretch, premium polyester cords prevent elongation in the Belt.
- 3 Fibre-filled base compound for increased transverse rigidity.

Reference Standards

- BS 3790, ISO 4184
- RMA IP-22

Product Range

Section	Top Width (mm)	Thickness (mm)	Angle (Degree)	Manufacturing Range		Length Designation
				Min.	Max.	
MF3-SPZ	10.0	8.0	40	479mm	4025mm	Lp
MF3-SPA	13.0	10.0	40	576mm	9087mm	Lp
MF3-SPB	17.0	14.0	40	1000mm	23606mm	Lp
MF3-SPC	22.0	18.0	40	1861mm	23629mm	Lp
MF3-3V	9.7	8.0	40	19.5"	160"	La
MF3-5V	15.8	13.5	40	48"	930"	La
MF3-8V	25.4	23.0	40	100"	933"	La

Note - Banded section are available upon request.

Applications

Hot Rolling Mills, Power Plants, Heat Exchanger, Compressors, Vacuum Pumps, Grinders, Kilns, Blenders, Excavators, Paper & Pulp Industry, Etc.