


PIX-Muscle® -XS3: High-power, Maintenance-free Wrap Belts

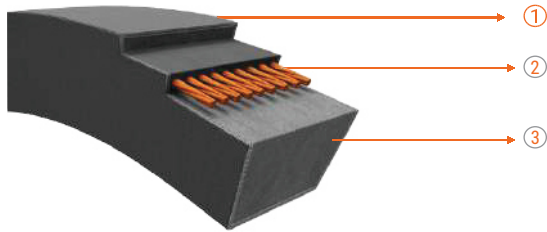

1. High wear-resistant outer jacketing, offers enhanced gripping strength
2. Maintenance-free, low-stretch, premium polyester cords prevent elongation in the Belt
3. Fibre-filled base compound for increased transverse rigidity

Features

- Extremely high power rating - up to 50% more than standard Belts
- High efficiency of up to 98%
- Special cords for maintenance-free operation
- Extended service life and less machine downtime
- Anti-static, complies with ISO 1813
- Superior oil and heat resistance
- REACH and RoHS compliant, provides an eco-friendly system
- Compatible with back idlers
- Extended temperature range from -25°C to +100°C

Reference Standards

BS 3790, ISO 4184, RMA IP-22

Product range

Section	Top Width (Th) (mm)	Thickness (Th) (mm)	Angle (θ) (Degree)	Min. Pulley Dia. (mm)	Manufacturing Range		Length Designation
					Min.	Max.	
MF3-SPZ	10.0	8.0	40	63	774 mm	4025 mm	Lp
MF3-SPA	13.0	10.0	40	90	576 mm	9087 mm	Lp
MF3-SPB	17.0	14.0	40	140	1000 mm	23606 mm	Lp
MF3-SPC	22.0	18.0	40	224	1861 mm	23629 mm	Lp
MF3-3V	9.7	8.0	40	63	19.5"	159"	La
MF3-5V	15.8	13.5	40	140	47"	930"	La
MF3-8V	25.4	23.0	40	335	100"	933"	La

• Intermediate sizes are available upon request

Application

Hot rolling mills, power plants, heat exchanger, compressors, vacuum pumps, grinders, kilns, blenders, excavators, paper & pulp industry, etc.

Product label

PIX-MUSCLE®-XS3 SPB 2000 Lp

MAINTENANCE FREE
 MAINTENANCE FREE
 MAINTENANCE FREE
 MAINTENANCE FREE
 MAINTENANCE FREE